Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: MI

Supplier's address: Byron , Flurweg 11, 82402 Seeshaupt, DE

Model identifier: MJGJD01YL

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	USB Type C		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

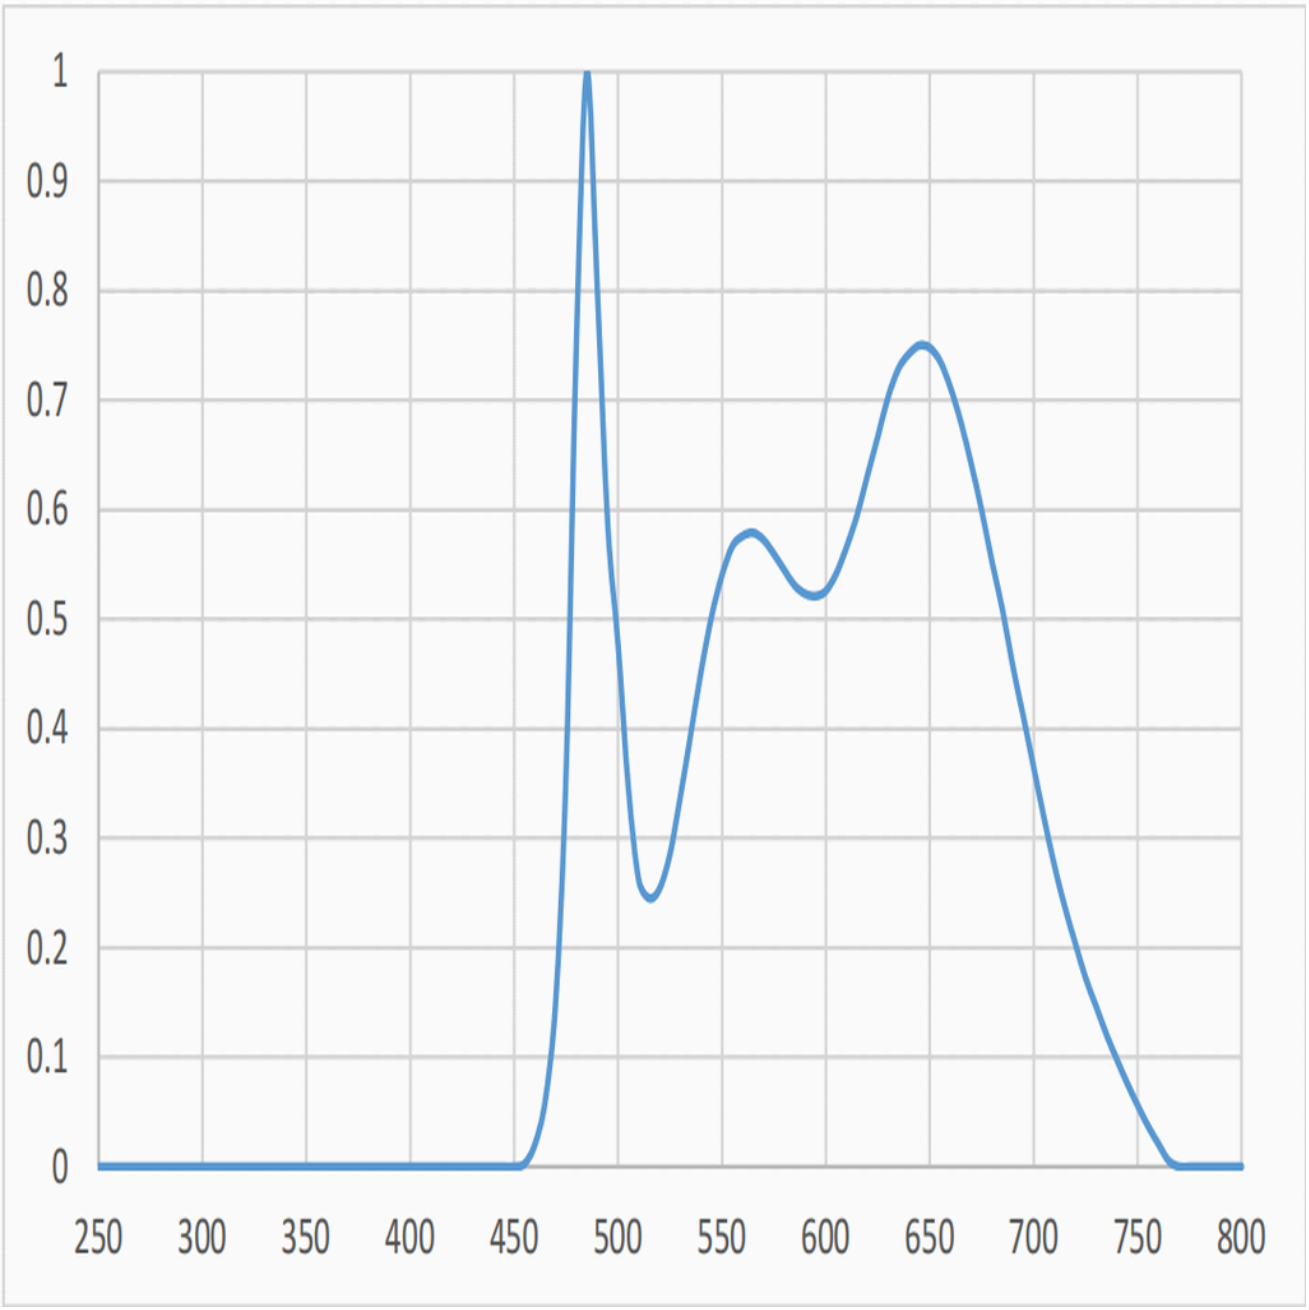
Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	G
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	270 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2700...6500
On-mode power (P_{on}), expressed in W	5,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,40
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	95
Outer dimensions without separate control gear, light-	Height: 448	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width: 23		
	Depth: 23		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[(a)]		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,380 0,366
Parameters for directional light sources:				
Peak luminous intensity (cd)		310	Beam angle in degrees, or the range of beam angles that can be set	110
Parameters for LED and OLED light sources:				
R9 colour rendering index value		50	Survival factor	0,90
the lumen maintenance factor		0,96		

[(a)] '-' : not applicable;

[(b)] '-' : not applicable;


1
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0.2
0.1
0
250
300
350
400
450
500
550
600
650
700
750
800

Model placed on the Union market from 01/09/2021

EPREL registration number: 706375

https://eprel.ec.europa.eu/qr/706375

Supplier: Yeelight Germany GmbH (Authorised representative)

Website: https://www.yeelight.de/

Customer care service:

Name: Byron

Website:

Email: qiaoyouchun@yeelight.com

Phone: +86 15065752726

Address:
Flurweg 11
82402 Seeshaupt
Germany